

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 February 2003 (06.02.2003)


PCT

(10) International Publication Number
WO 03/010438 A1

- (51) International Patent Classification⁷: F04D 29/32, 29/52
- (21) International Application Number: PCT/IT02/00492
- (22) International Filing Date: 26 July 2002 (26.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BO2001A 000485 27 July 2001 (27.07.2001) IT
- (71) Applicant (for all designated States except US): SPAL S.R.L. [IT/IT]; Via per Carpi, 26/B, I-42015 Correggio (IT).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): SPAGGIARI, Alessandro [IT/IT]; Via L. Da Vinci, 8, I-42015 Correggio (IT).
- (74) Agents: JORIO, Paolo et al.; Studio Torta S.r.l., Via Viotti, 9, I-10121 Torino (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: VENTILATION UNIT

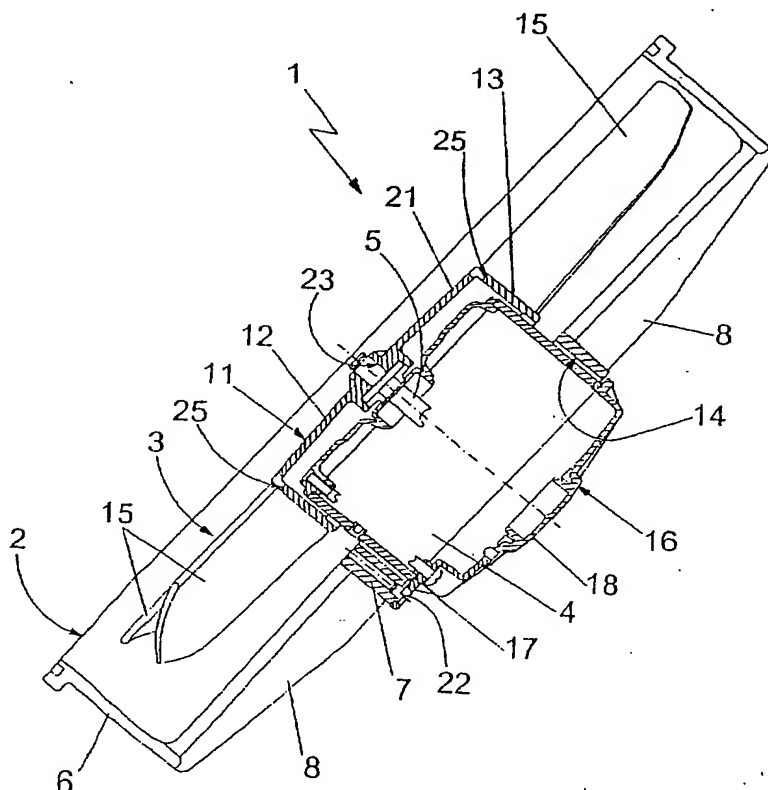

(57) Abstract: The ventilation unit (1) has an electric motor (4), the output shaft (5) of which is fitted with a fan (3) having a cup-shaped central body (11) and a number of blades (15). The central body (11) is defined by a base wall (12), and by an annular wall (13) whose outer face the blades (15) extend. And the main characteristic of the present invention lies in through windows (25) being formed in the annular wall (13) of the central body (11) to channel out, in use, any condensate formed inside the central body (11).

WO 03/010438 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

4/PRTS 1

JC05 Rec'd PCT/PTO 23 SEP 2005

5

VENTILATION UNIT

TECHNICAL FIELD

10 The present invention relates to a ventilation unit, in particular, but not exclusively, for on-vehicle devices such as radiators, heat exchangers, etc.

BACKGROUND ART

15 As is known, ventilation units substantially comprise a fan defined by a cup-shaped central body having a base wall and a cylindrical lateral wall, and by a number of blades extending substantially radially from the outer face of the lateral wall; and
20 the central body is fitted to the output shaft of an electric motor housed at least partly in the central body.

 One of the main problems of ventilation units of the above type is the formation, inside the central
25 body, of condensate which must be channeled out of the unit.

 At present, this is done by forming through holes in the base wall of the central body.

In actual fact, however, the problem is only partly solved on account of most of the condensate, as opposed to being channeled out of the unit through the holes, being spun by the fan onto the inner face of the lateral wall of the central body. Most of the condensate therefore remains inside the central body and, when the fan is off, may flow towards the electric motor which, as is known, has metal parts and electric circuits which are easily damaged by contact with liquid and/or steam.

Moreover, the ventilation unit may be installed inside or outside the vehicle, in which latter case, the through holes further endanger operation of the electric motor by also channeling rainwater towards it.

DISCLOSURE OF INVENTION

It is therefore an object of the present invention to provide a ventilation unit designed to eliminate the aforementioned drawback by means of relatively straightforward, low-cost structural features.

According to the present invention, there is provided a ventilation unit of the type comprising an electric motor, the output shaft of which is fitted with a fan having a cup-shaped central body and a number of blades; said central body being defined by a base wall, and by an annular wall from whose outer face said blades extend; and said ventilation unit

being characterized in that at least one through window is formed in said annular wall to channel out, in use, any condensate formed inside said central body.

5 BRIEF DESCRIPTION OF THE DRAWINGS

A non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a side view of a ventilation unit
10 in accordance with the teachings of the present invention;

Figure 2 shows a diametrical section of the Figure 1 ventilation unit;

Figures 3 and 4 show a side view and plan view
15 respectively of a fan of the Figure 1 ventilation unit.

BEST MODE FOR CARRYING OUT THE INVENTION

With reference to Figures 1 and 2, number 1 indicates as a whole a ventilation unit installed at
20 on-vehicle devices (not shown) such as radiators and heat exchangers, or at other temperature-regulating devices, and which, as is known, is substantially used to disperse into the environment, the heat produced by such devices.

25 Ventilation unit 1 comprises a frame 2 fitted integrally to a fixed structure (not shown) on the vehicle; a fan 3 installed inside frame 2; and an electric motor 4, the casing of which is integral

with frame 2, and the output shaft 5 of which is fitted with fan 3.

With reference to Figures 1 and 2, frame 2 comprises an annular wall 6; a central sleeve 7 coaxial with annular wall 6; and a number of equally spaced radial ribs 8 connecting the outer face of sleeve 7 to the inner face of annular wall 6. More specifically, sleeve 7 and ribs 8 are formed at an axial end edge of annular wall 6; in fact, almost the whole length of sleeve 7 extends axially outside the space enclosed by annular wall 6.

With reference to Figures 3 and 4, fan 3 comprises a cup-shaped central body 11 coaxial with sleeve 7 and with annular wall 6 of frame 2, and which comprises a base wall 12, and an annular wall 13 extending from base wall 12 towards sleeve 7. Central body 11 and sleeve 7 have substantially the same inside diameter, and define a seat 14 (Figure 2) for housing electric motor 4; and fan 3 also comprises a number of equally spaced blades 15 extending from the outer face of annular wall 13 towards the inner face of annular wall 6.

With reference to Figure 2, electric motor 4 is installed inside a cylindrical casing 16 defined by an annular lateral wall 17 and by two axial end covers 18 and 21; casing 16 is fixed by screws 22 to sleeve 7; shaft 5 extends outwards of casing 16 through cover 21; and the axial end portion of shaft

5 is fitted with central body 11. More specifically, a through hole 23 is formed in the central portion of base wall 12, and is engaged integrally by said axial end portion of shaft 5;

5 said central portion is thicker than the rest of base wall 12; and equally spaced reinforcing ribs 24 (Figure 4) are formed between said central portion and the inner face of annular wall 13.

With reference to Figures 2, 3 and 4, through

10 windows 25 are formed in annular wall 13 of central body 11, close to the peripheral edge of base wall 12. In actual use, condensate is channeled out of ventilation unit 1 through windows 25, which are equally spaced and, in particular, each formed in the

15 gap between two adjacent blades 15.

The advantages of the present invention will be clear from the foregoing description.

In particular, given the centrifugal force to which the condensate is subjected by rotation of fan

20 3, forming windows 25 in annular wall 13 provides for more effectively channeling the condensate outwards. Moreover, when installed outside the vehicle, ventilation unit 1 is protected against infiltration by rainwater, thus safeguarding electric motor 4

25 against damage by water and/or steam, and so increasing the working life of electric motor 4, which in fact is the most expensive part of ventilation unit 1.

CLAIMS

1) A ventilation unit (1) of the type comprising an electric motor (4), the output shaft (5) of which is fitted with a fan (3) having a cup-shaped central body (11) and a number of blades (15); said central
5 body (11) being defined by a base wall (12), and by an annular wall (13) from whose outer face said blades (15) extend; and said ventilation unit (1) being characterized in that at least one through
10 window (25) is formed in said annular wall (13) to channel out, in use, any condensate formed inside said central body (11).

2) A ventilation unit (1) as claimed in Claim 1, characterized in that said through window (25) is
15 formed close to the peripheral edge of said base wall (12).

3) A ventilation unit (1) as claimed in Claim 1 and/or 2, characterized in that a number of said through windows (25) are formed in said annular wall
20 (13).

4) A ventilation unit (1) as claimed in Claim 3, characterized in that a number of equally spaced said through windows (25) are formed in said annular wall
(13).

25 5) A ventilation unit (1) as claimed in Claim 3 and/or 4, characterized in that said through windows (25) are each formed in the gap between two adjacent blades (15).

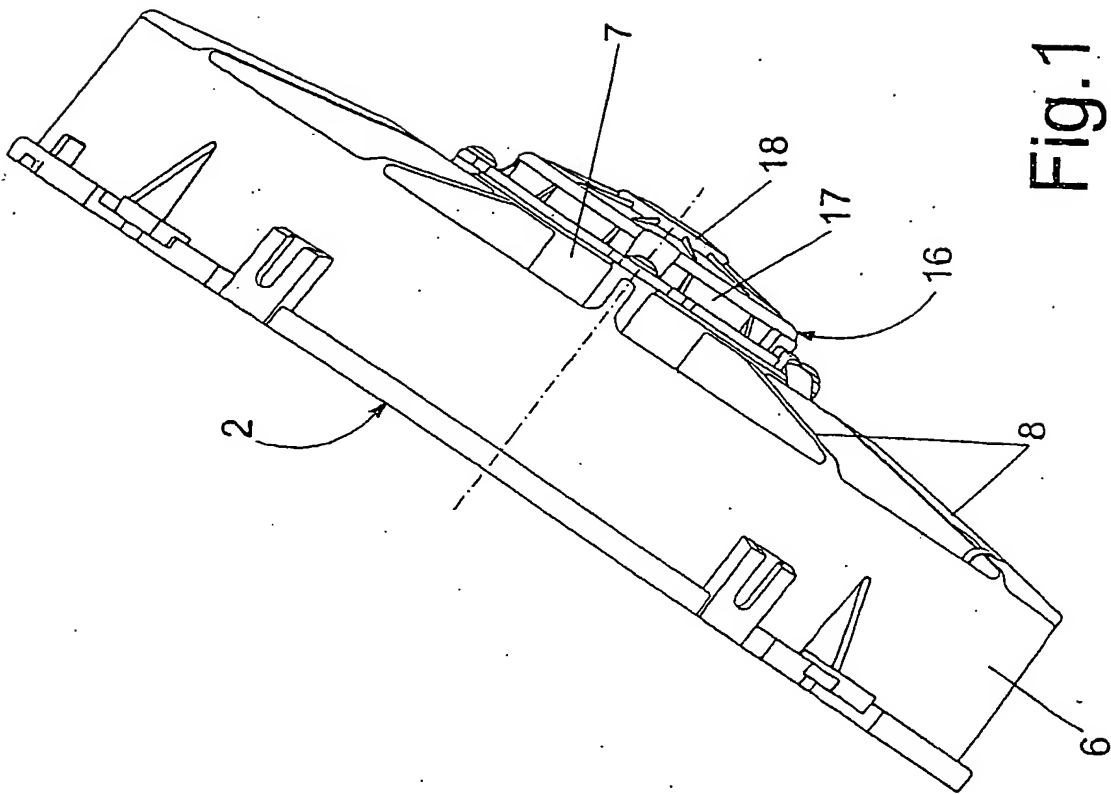
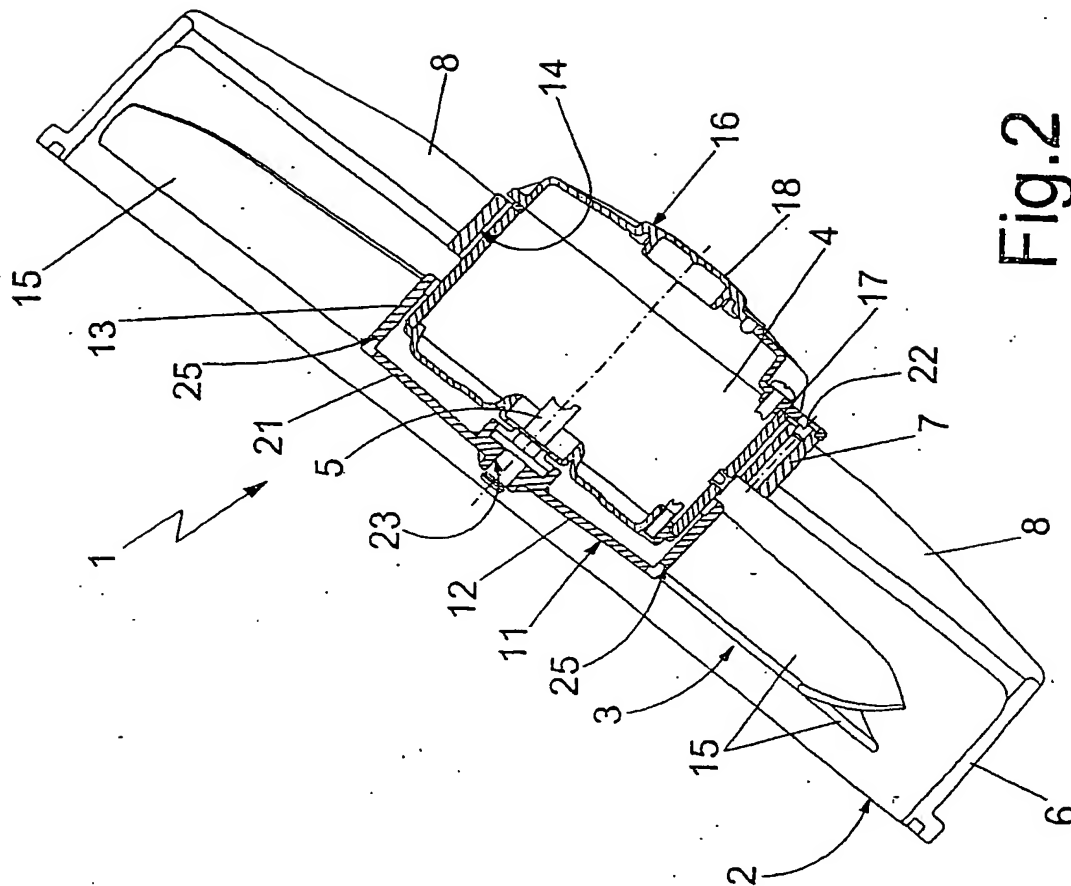


Fig.1



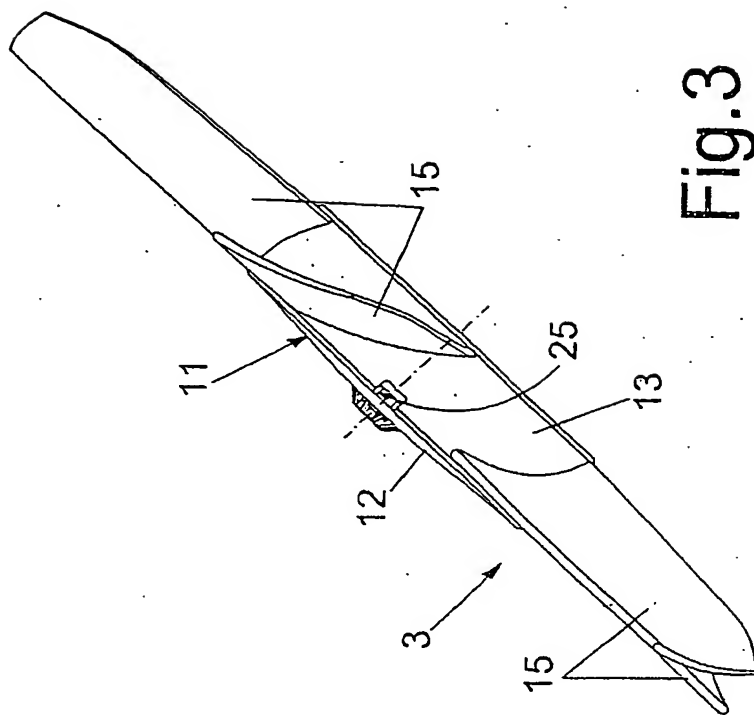


Fig. 3

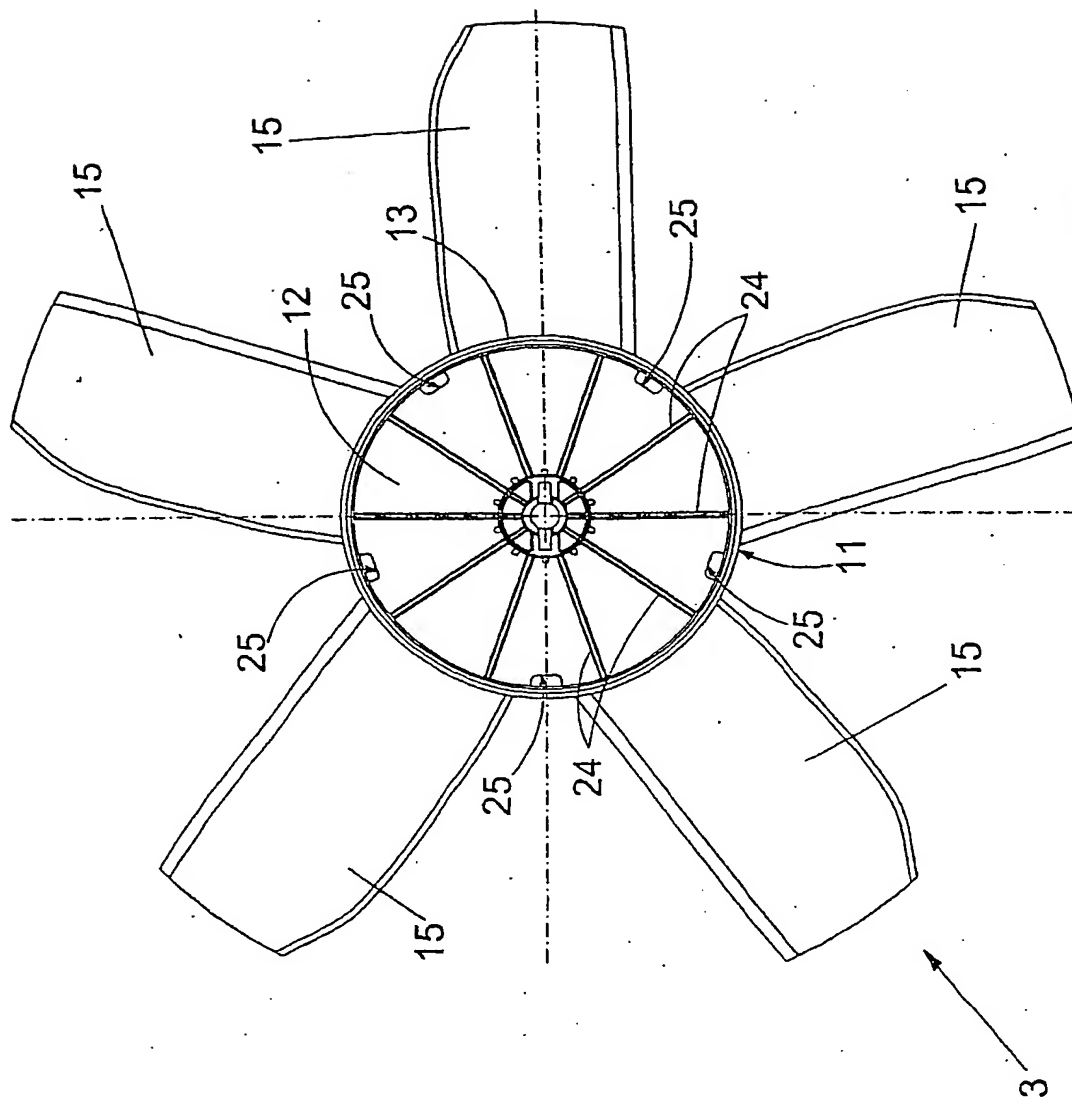


Fig.4

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/IT 02/00492

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04D29/32 F04D29/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 193 981 A (SCHEIDEL WOLFGANG ET AL) 16 March 1993 (1993-03-16) column 2, line 39 -column 3, line 37 ---	1-5
A	DE 195 13 135 A (AEG KLEINMOTOREN GMBH) 10 October 1996 (1996-10-10) abstract ---	1
A	EP 0 223 750 A (SPAL SRL) 27 May 1987 (1987-05-27) abstract ---	1
A	DE 39 41 612 A (BEHR GMBH & CO) 20 June 1991 (1991-06-20) abstract; figure 3 ---	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

26 November 2002

Date of mailing of the international search report

05/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fistas, N

INTERNATIONAL SEARCH REPORT

Internatl. Application No

PCT/IT 02/00492

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 462 757 A (UEMURA MASAKAZU) 31 July 1984 (1984-07-31) column 1, line 11 - line 45 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internatl Application No

PCT/IT 02/00492

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5193981	A	16-03-1993	DE	4102161 A1	30-07-1992
			FR	2672089 A1	31-07-1992
			IT	1258799 B	29-02-1996
DE 19513135	A	10-10-1996	DE	19513135 A1	10-10-1996
EP 0223750	A	27-05-1987	EP	0223750 A1	27-05-1987
DE 3941612	A	20-06-1991	DE	3941612 A1	20-06-1991
US 4462757	A	31-07-1984	JP	58065999 A	19-04-1983
			DE	3270145 D1	30-04-1986
			EP	0077039 A2	20-04-1983